

# The Blue MAX



# Model SW-2832



SW-2832-R

Lay down door and rollout turntable makes for easy loading and unloading. Lay down door keeps the shop floor drier and cleaner.




SW-2832G-HT



Gear driven turntable with spring loaded safety clutch guarantees consistent turntable rotation within the spray chamber for a complete cleaning job.



All AXE Blue Max Spraywashers include a bullet proof fully protected electrical system to insure long life for your motors, switches, and heating system.



The Blue Max spacious 28" diameter turntable allows for studed block applications while the 32" vertical height will hold most any 6 cylinder block. application. Great for transmission and industrial applications also.

## 3 sizes of built in Hot Tanks



A well designed spray manifold is a key component for good cleaning. The Blue Max series uses large 2" diameter tubing with smooth radius style elbows in a 360 degree design inside the spray chamber for a non restrictive flow. Couple this design with its 7.5 hp pump and you get 100 gallons of hot water every minute over the parts inside quickly sheering away grease and grime.



SW-2832-HT  
24" X 34" X 11"




SW-2832-R  
13" X 34" X 11"



**Call or Click**  
**800-251-0018**

**www.axeequipment.com**

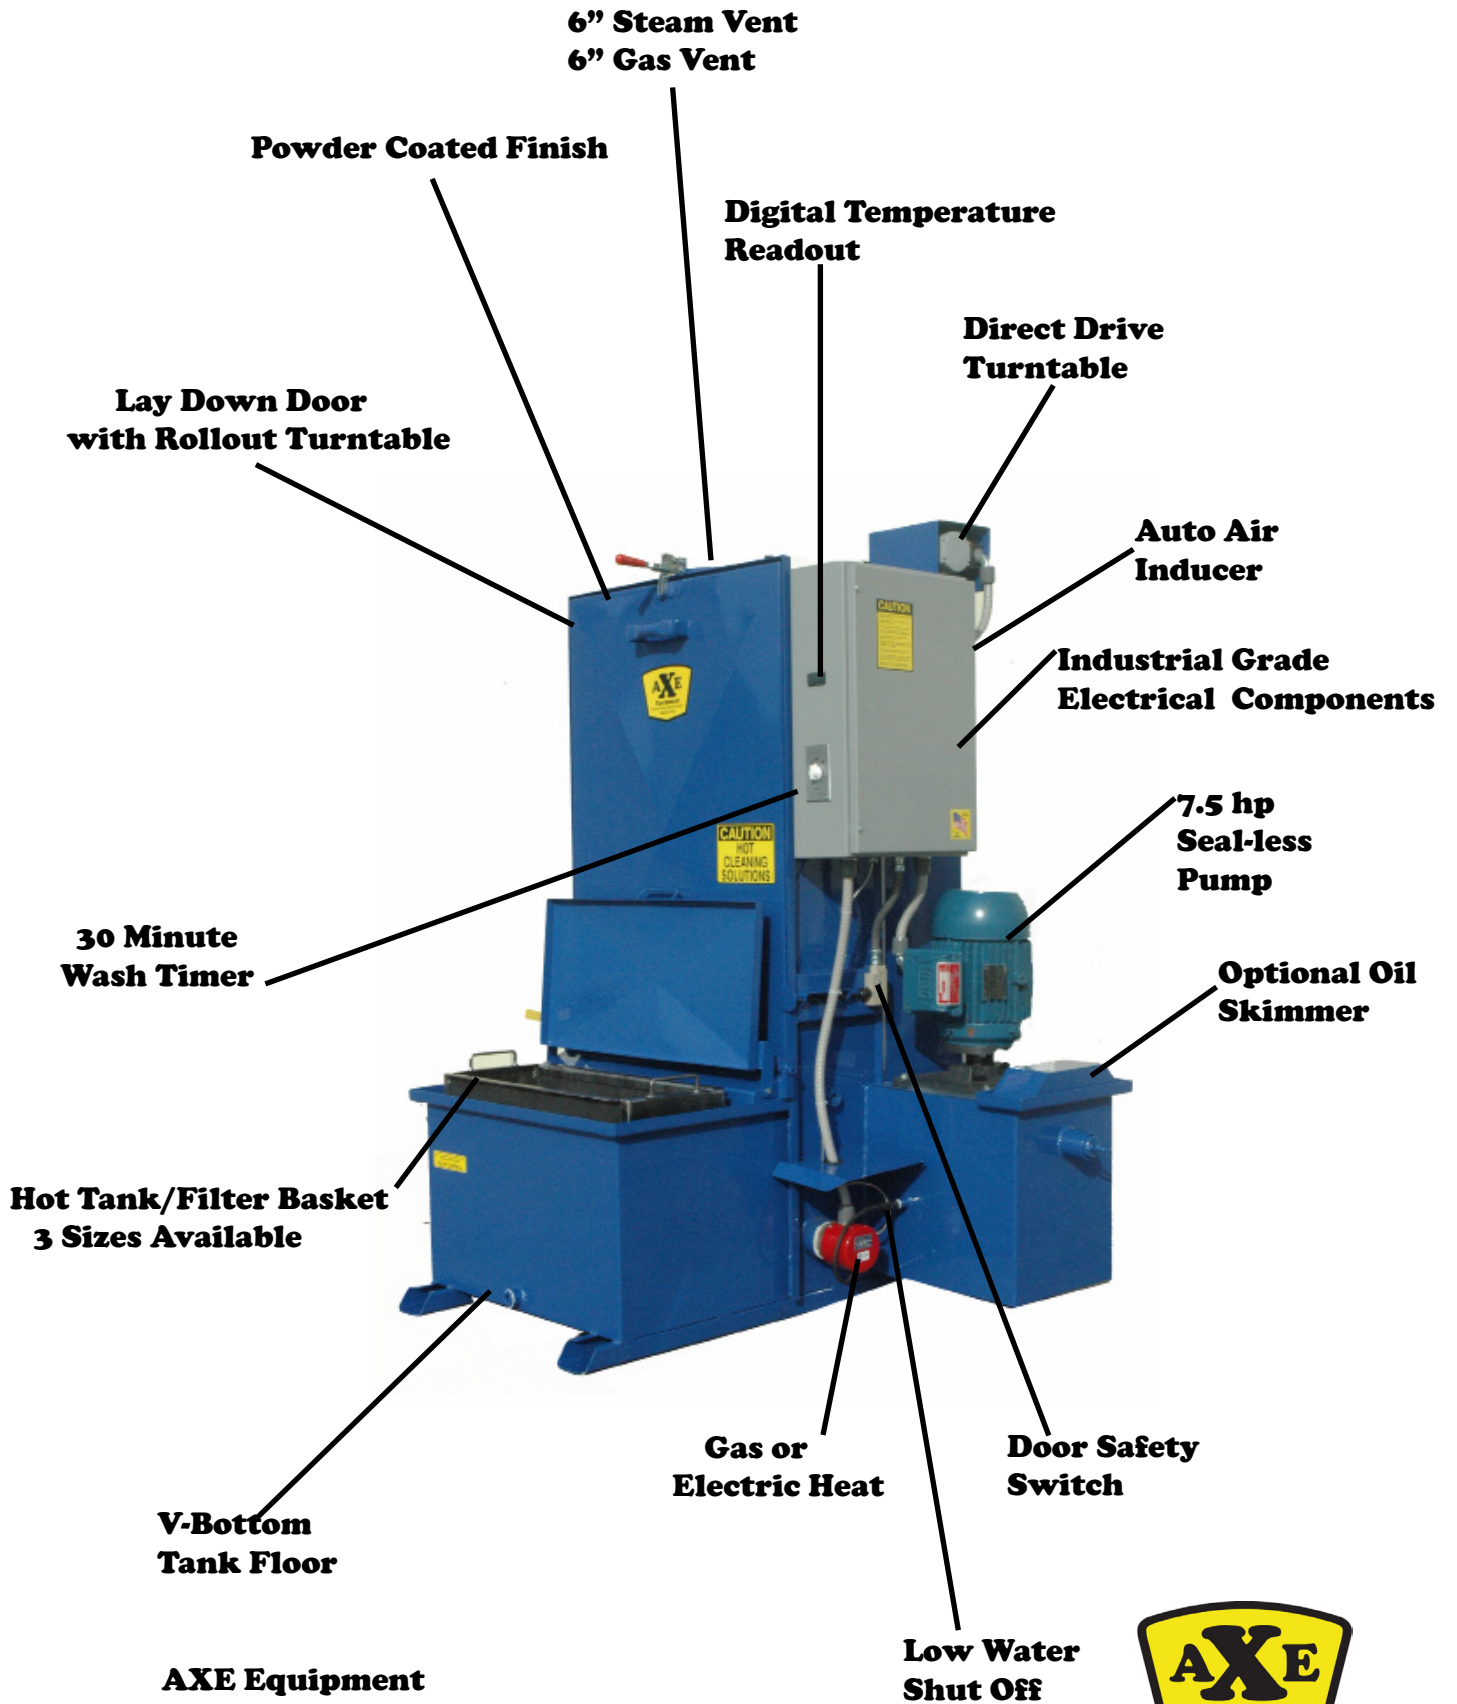

**AXE Equipment**  
**1040 N. Union**  
**Council Grove, KS 66846**  
**www.axeequipment.com**  
**perry@axeequipment.com**



**Call or Click**  
**800-251-0018**

**www.axeequipment.com**

**For Quality and Efficiency Look To AXE**

MODEL	SW-2832-LIGHT	SW-2832-R	SW-2832-HT	SW-2832-EX
<b>WORK CAPACITY</b>				
HEIGHT	32"	32	32	32
TURNTABLE DIA.	28"	28"	28"	28"
LOAD WEIGHT CAPACITY	500 LBS	500 LBS	500 LBS	500 LBS
<b>FLOOR SPACE REQUIRED</b>				
HEIGHT	66"	66"	66"	66"
WIDTH	50"	57"	57"	73"
LENGTH: DOOR OPEN	80"	80"	80"	80"
DOOR CLOSED	54"	60"	60"	60"
TURNTABLE HEIGHT (ABOVE FLOOR)	27"	27"	27"	27"
SHIPPING WEIGHT	1300 LBS	1,500 LBS	1600 LBS	1800 LBS
<b>CLEANING SYSTEM</b>				
SOLUTION CAPACITY	110 gals.	110 gals.	140 gals.	160 gals
PUMP MOTOR	7.5 HP	7.5 HP	7.5 HP	7.5 HP
PUMP OUTPUT	75 psi @ 100 gpm	75 psi @ 100 gpm	75 psi @ 100 gpm	75 psi @ 100 gpm
SPRAY NOZZLES	20 alternating	20 alternating	20 alternating	20 alternating
FILTER SCREEN	1200 sq."	1200 sq."	1450 sq."	2530 sq."
<b>CABINET CONSTRUCTION</b>				
GAUGE STEEL	12 gauge	12 gauge	12 gauge	12 gauge
INSULATION	N/A	1" fiberglass	1" fiberglass	1" fiberglass
STEAM VENT	6"	6"	6"	6"
GAS VENT	4"	4"	4"	6"
<b>HEAT SOURCE</b>				
ELECTRIC ELEMENT	12 kw	12 kw	12 kw	15 kw
GAS BURNER	100,000 BTU	100,000 BTU	100,000 BTU	150,000 BTU
<b>HOT TANK BASKETS</b>				
WIDTH (I.D.)	13"	13"	24"	24"
LENGTH (I.D.)	34"	34"	34"	55"
DEPTH (I.D.)	11"	11"	11"	11"
<b>ELECTRICAL REQ.</b>				
PUMP MOTOR 3 PHASE	208/ 230/ 460 Volts 21 18 9.4 amps	208 / 230 / 460 Volts 21 18 9.4 Amps		
ELECTRICAL HEAT 3 PHASE	(12 KW) 208/230/460 Volts 33-29-17 Amps	(12 KW) 208/230/460 Volts 33-29-17 Amps	(12 KW) 208/230/460 Volts 33-29-17 Amps	(15 KW) 208/230/460 Volts
<b>*ELECTRICAL OPTIONS</b>				
PUMP MOTOR 1 PHASE	230 Volts, 33 Amps	230 Volts, 33 Amps		
ELECTRIC HEATER 1 PHASE	(12 KW) 230 Volts 52 Amps	(12 KW) 230 Volts 52 Amps	(12 KW) 230 Volts 52 Amps	(15 KW) 230 Volts
<b>STANDARD EQUIPMENT</b>				
LOW WATER SWITCH	ELECTRIC HEAT ONLY	ELECTRIC HEAT ONLY		
DUAL 7 DAY TIMERS	STANDARD	STANDARD		
DIGITAL TEMP CONTROLLER	STANDARD	STANDARD		
HEAD RACK/CRANK RACK	STANDARD	STANDARD		
AUTO AIR INDUCER	STANDARD	STANDARD		
SHORT CIRCUIT PROTECTION	STANDARD	STANDARD		
THERMAL PROTECTION	STANDARD	STANDARD		
LAY DOWN DOOR/SEALESS	STANDARD	STANDARD		
V-BOTTOM FLOOR	STANDARD	STANDARD		
BUILT IN HOT TANK	STANDARD	STANDARD		
MOISTURE PROOF ELECTRONICS	STANDARD	STANDARD		
360 DEGREE MANIFOLD	STANDARD	STANDARD		
WARRANTY	ONE YEAR	ONE YEAR		
1" INSULATION	N/A	STANDARD		
<b>OPTIONS</b>				
28" TURNTABLE BASKET	OPTIONAL	OPTIONAL		
480 VOLTS 3 PHASE	OPTIONAL	OPTIONAL		
OIL SKIMMER	OPTIONAL	OPTIONAL		